


3109 DIGITAL OUTSIDE MICROMETRES

- Resolution 0.001mm/0.00005"
- Button function: on/off, set, mm/inch, ABS/INC
- No data output
- LR44 battery, automatic power off
- Carbide measuring faces
- Friction thimble
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm)

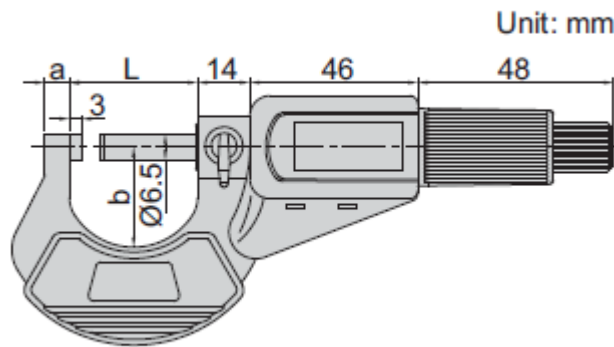


Code	Range	Accuracy	L	a	b
3109-25A *	0-25mm/0-1"	$\pm 2\mu\text{m}$	32mm	6mm	27.5mm
3109-50A *	25-50mm/1-2"	$\pm 2\mu\text{m}$	57mm	8mm	37mm
3109-75A *	50-75mm/2-3"	$\pm 3\mu\text{m}$	82mm	8mm	50mm
3109-100A *	75-100mm/3-4"	$\pm 3\mu\text{m}$	107mm	10mm	61mm
3109-125A	100-125mm/4-5"	$\pm 3\mu\text{m}$	132mm	10mm	73mm
3109-150A	125-150mm/5-6"	$\pm 3\mu\text{m}$	157mm	10mm	85mm
3109-175A	150-175mm/6-7"	$\pm 4\mu\text{m}$	182mm	21mm	104mm
3109-200A	175-200mm/7-8"	$\pm 4\mu\text{m}$	207mm	21mm	117mm

Set

Code	Range	Micrometers included	Packaging
3109-753A *	0-75mm/0-3"	3109-25A, 3109-50A, 3109-75A	blow mould case
3109-1004A *	0-100mm/0-4"	3109-25A, 3109-50A, 3109-75A, 3109-100A	blow mould case
3109-1506A	0-150mm/0-6"	3109-25A, 3109-50A, 3109-75A, 3109-100A, 3109-125A, 3109-150A	aluminum box



spherical anvil
(included)



measure tube
wall thickness



friction
thimble for one
hand operation





3109-753A



3109-1506A